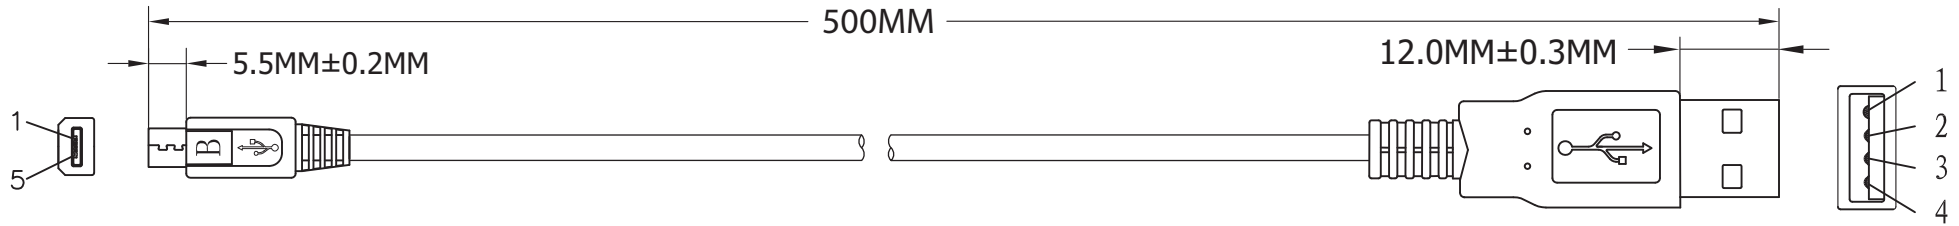
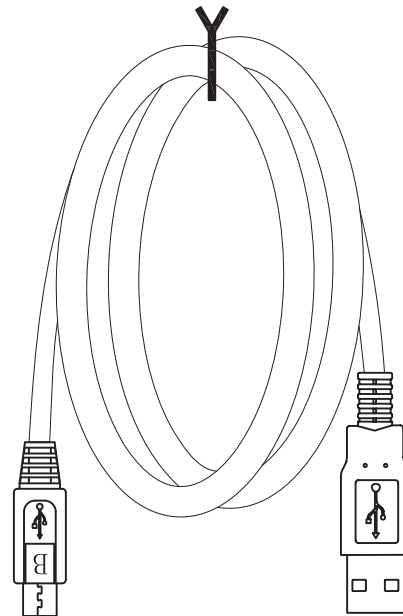



P2**P1**

PIN ASSIGNMENT		
P1		P2
1	RED	1
2	WHITE	2
3	GREEN	3
5	BLACK	4
SHELL	DRAIN + BRAID	SHELL

Material:

- Cable: USB2.0 UL2725 [28AWG(7/0.12TC+AL)*1P+28AWG(7/0.12TC)*2C]+AEB(48B TC)
 - Jacket: Black
 - OD: 3.5MM
- P1 Connector: Micro USB 5P B/M Solder Type
 - Shell: Nickel
 - Pin: G/F
 - Insulator Color: Black
 - Outer Jacket: Black PVC-50P
- P2 Connector: USB A Male
 - Shell: Nickel
 - Pin: G/F
 - 3PCS Type
 - Insulator Color: White
 - Outer Jacket: Black PVC-40P

Electrical:

- 100% short, open, miswire test
- Conduct resistance: 2Ω Max.
- Insulation resistance: 5MΩ Min.
- Hi-Pot test: 300V DC

⊕ = Assmann logo

RoHS
Compliant

ITEM NO.

AK67421-0.5-R

TITLE

USB2.0 Micro Connection Cable, 0.5 Meter
USB B Micro Male <=> USB A Male

ASSMANN
Electronics, Inc.

1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283
Toll Free: 1-877-277-6266 • eMail: info@assmann.us

THIS DRAWING IS UNPUBLISHED
©Copyright 2009 by Assmann Electronic Components
All International Rights Reserved