



UNIT:mm

CABLE MARK:E468041 AWM STYLE 2725 80°C 30V VW-1 SUPER HIGH SPEED USB Revision 3.1 SINO SYNC5

1000±20


6.5±0.1

6.5±0.1



SIDE:A

SIDE:B




PIN ASSIGNMENT

SIDE:A TYPE C		SIDE:B TYPE C
A2	RED RED<twine>	B11
A3	WHITE WHITE<twine>	B10
B11	GREEN GREEN<twine>	A2
B10	BLACK BLACK<twine>	A3
B2	BLUE BLUE<twine>	A11
B3	YELLOW YELLOW<twine>	A10
A11	ORANGE ORANGE<twine>	B2
A10	BROWN BROWN<twine>	B3
A6	WHITE	A6
A7	GREEN	A7
A5	PINK	A5
A8	BLUE	B8
B8	YELLOW	A8
A4+B4+A9+B9	RED	A4+B4+A9+B9
B5	BLACK	B5
SHELL	WIRE+BRAID	SHELL

Electronic Test:

- 1.100% Test,(Open,Short,Miss Wire)
- 2.Contact Resistance:2 ohm max.
- 3.Insulation Resistance:5M ohm min.
- 4.Hi-Pot:300V DC/10ms

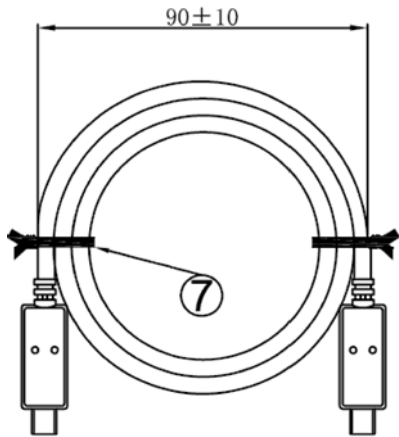

200pcs/carton

NO.	NAME	Q'TY	SPECIFICATION
⑦	TIE	2	BLACK L=50mm.
⑥	TUBE	2	HEAT SHRINK TUBE BLACK OD2.0*L=6mm.
⑤	TUBE	2	HEAT SHRINK TUBE BLACK OD1.0*L=10mm.
④	OUT JACKET	15g	OUTER MOLD:45P PVC COLOR:BLACK
③	IN JACKET	6g	OUTER MOLD:45P PVC COLOR:BLACK
②	CONN	2	USB3.1 C TYPE PIN-G/F INSULATION COLOR:BLUE SHELL-NICKEL
①	CABLE	1	(7/0.08TC*1C+SP+AL+HMAM)*8C+7/0.06TC*1P+7/0.06TC*3C+7/0.16TC*2C+F+2D+AB PVC JACKET:BLACK OD4.0mm

CnC Tech, LLC			
Industrial Cable and Connector Technology			
DRAWN BY	H S F	DARWING NO.	
CHECKED BY		CUSTOMER	
APPROVAL BY		ITEM NO.	105-1042-BL-00100
DECIDE BY		DATE	2015-04-22
VERSIONS/EDITEON	A/1	PROJECTION	