



REV.	DESCRIPTION	DATE
A	NEW DRAWING	4/20/2006

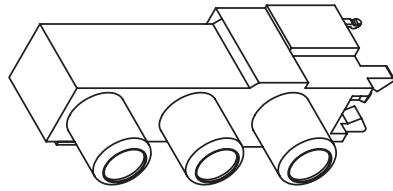

SPECIFICATIONS:
 CONTACT RESISTANCE: 30m OHMS MAX
 INSULATION RESISTANCE: 100M OHMS MIN: 500V DC
 VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE
 LIFE: 5,000 CYCLES
 OPERATING TEMP: -20° ~ +85°C

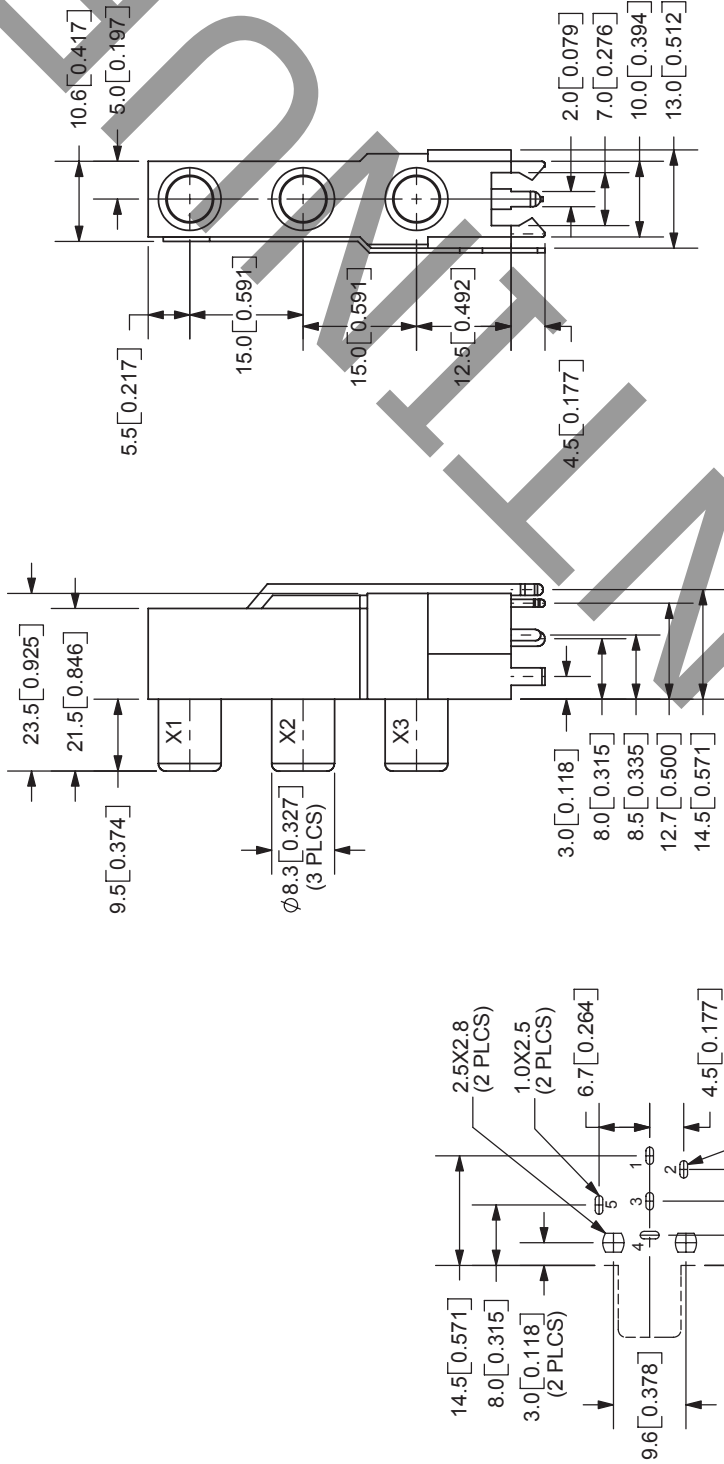


TOLERANCE:
 ±0.3mm UNLESS OTHERWISE
 SPECIFIED



9615 SW Allen Blvd., Ste. 103
 Beaverton, OR 97005
 Phone: 503-643-4899
 800-275-4899
 Fax: 503-372-1266
 Website: www.cui.com

COLOR INDEX	
PART NO.	INPUT X1 INPUT X2 INPUT X3
RCJ-33234	Red Color White Color Yellow Color
RCJ-33X1 X2 X3	Color X1 Color X2 Color X3
COLOR CHART	
1 Black	BARRELS
2 Red	TERMINAL 1
3 White	TERMINAL 2
4 Yellow	TERMINAL 3
5 Blue	HOUSING 1
6 Green	HOUSING 2
7 Orange	INPUT X1
	INPUT X2
	INPUT X3
MATERIAL	
Brass	PLATING
Brass	Nickel
Brass	Silver
Brass	Silver
Brass	Silver
ABS	Black Color
ABS	Black Color
PBT	see color index
PBT	see color index
PBT	see color index

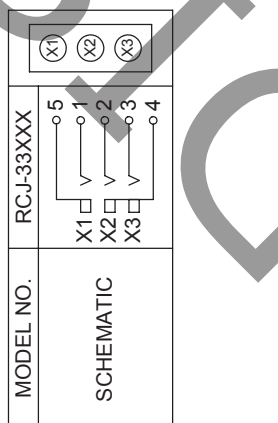

TITLE:	RCA Jack, Dual, Rt Angle, PCB Mount, Vert.	REV:	A
PART NO:	RCJ-33XXX	UNITS:	MM [INCHES]
DRAWN BY:	ZRJ	APPROVED BY:	
PC FILE NAME:	RCJ-33XXX	SCALE:	1:1