

SKKT 15, SKKH 15



SEMIPACK® 0

Thyristor / Diode Modules

SKKT 15

SKKH 15

Features


- Heat transfer through aluminium oxide ceramic isolated metal baseplate
- Hard soldered joints for high reliability
- UL recognized, file no. E 63 532

Typical Applications*

- DC motor control (e. g. for machine tools)
- Temperature control (e. g. for ovens, chemical processes)
- Professional light dimming (studios, theaters)

| V_{RSM} V | V_{RRM}, V_{DRM} V | $I_{TRMS} = 24$ A (maximum value for continuous operation) $I_{TAV} = 15$ A (sin. 180; $T_c = 75$ °C) | |
|----------------|-------------------------|--|-------------|
| 700 | 600 | SKKT 15/06E | SKKH 15/06E |
| 900 | 800 | SKKT 15/08E | SKKH 15/08E |
| 1300 | 1200 | SKKT 15/12E | SKKH 15/12E |
| 1500 | 1400 | SKKT 15/14E | SKKH 15/14E |
| 1700 | 1600 | SKKT 15/16E | SKKH 15/16E |

| Symbol | Conditions | Values | Units |
|------------------|---|----------------|------------------|
| I_{TAV} | sin. 180; $T_c = 85$ (100) °C; | 13,5 (9,5) | A |
| I_D | P13A/100; $T_a = 45$ °C; B2 / B6 | 14 / 17 | A |
| I_{RMS} | P13A/100; $T_a = 45$ °C; W1 / W3 | 21 / 3 x 12 | A |
| I_{TSM} | $T_{vj} = 25$ °C; 10 ms | 320 | A |
| | $T_{vj} = 125$ °C; 10 ms | 280 | A |
| i^2t | $T_{vj} = 25$ °C; 8,3 ... 10 ms | 510 | A ² s |
| | $T_{vj} = 125$ °C; 8,3 ... 10 ms | 390 | A ² s |
| V_T | $T_{vj} = 25$ °C; $I_T = 75$ A | max. 2,45 | V |
| $V_{T(TO)}$ | $T_{vj} = 125$ °C | max. 1,1 | V |
| r_T | $T_{vj} = 125$ °C | max. 20 | mΩ |
| I_{DD}, I_{RD} | $T_{vj} = 125$ °C; $V_{RD} = V_{RRM}, V_{DD} = V_{DRM}$ | max. 8 | mA |
| t_{gd} | $T_{vj} = 25$ °C; $I_G = 1$ A; $di_G/dt = 1$ A/μs | 1 | μs |
| t_{gr} | $V_D = 0,67 * V_{DRM}$ | 1 | μs |
| $(di/dt)_{cr}$ | $T_{vj} = 125$ °C | max. 100 | A/μs |
| $(dv/dt)_{cr}$ | $T_{vj} = 125$ °C | max. 1000 | V/μs |
| t_q | $T_{vj} = 125$ °C | 80 | μs |
| I_H | $T_{vj} = 25$ °C; typ. / max. | 80 / 150 | mA |
| I_L | $T_{vj} = 25$ °C; $R_G = 33$ Ω; typ. / max. | 150 / 300 | mA |
| V_{GT} | $T_{vj} = 25$ °C; d.c. | min. 3 | V |
| I_{GT} | $T_{vj} = 25$ °C; d.c. | min. 100 | mA |
| V_{GD} | $T_{vj} = 125$ °C; d.c. | max. 0,25 | V |
| I_{GD} | $T_{vj} = 125$ °C; d.c. | max. 5 | mA |
| $R_{th(j-c)}$ | cont.; per thyristor / per module | 1,6 / 0,8 | K/W |
| $R_{th(j-c)}$ | sin. 180; per thyristor / per module | 1,7 / 0,9 | K/W |
| $R_{th(j-c)}$ | rec. 120; per thyristor / per module | 1,8 / 0,9 | K/W |
| $R_{th(c-s)}$ | per thyristor / module | 0,2 / 0,1 | K/W |
| T_{vj} | | - 40 ... + 125 | °C |
| T_{stg} | | - 40 ... + 125 | °C |
| V_{isol} | a. c. 50 Hz; r.m.s.; 1 s / 1 min. | 3600 / 3000 | V~ |
| M_s | to heatsink | 1,5 ± 15 % | Nm |
| a | | 5 * 9,81 | m/s ² |
| m | approx. | 50 | g |
| Case | SKKT | A 1 | |
| | SKKH | A 2 | |

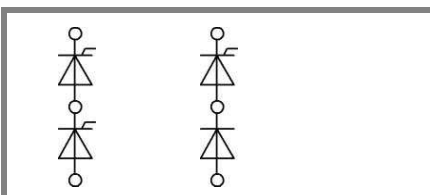

SKKT

SKKH

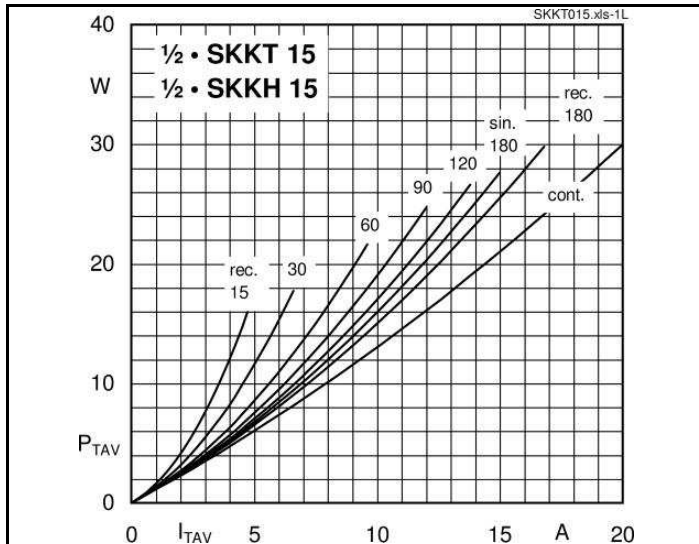


Fig. 1L Power dissipation per thyristor vs. on-state current

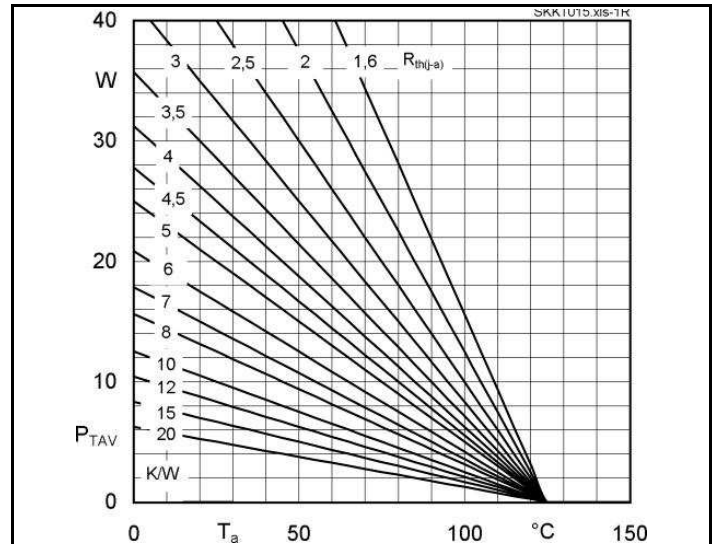


Fig. 1R Power dissipation per thyristor vs. ambient temp.

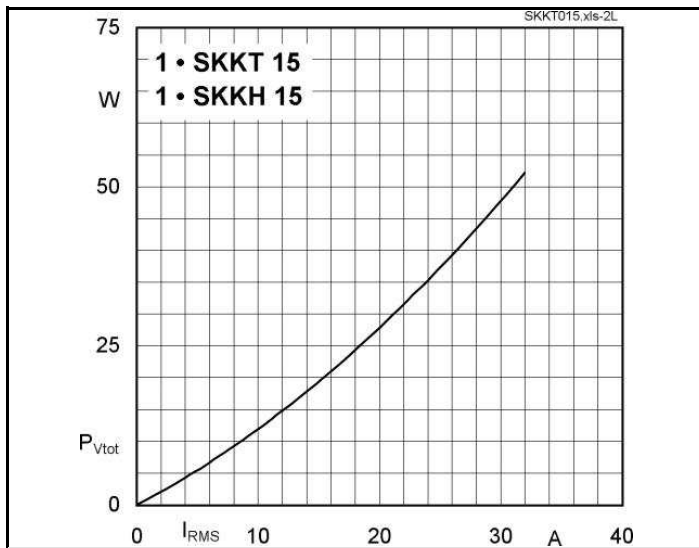


Fig. 2L Power dissipation per module vs. rms current

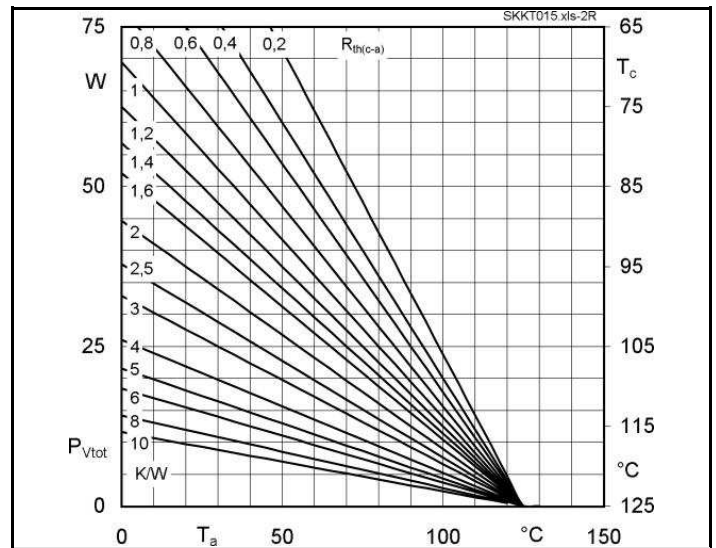


Fig. 2R Power dissipation per module vs. case temp.

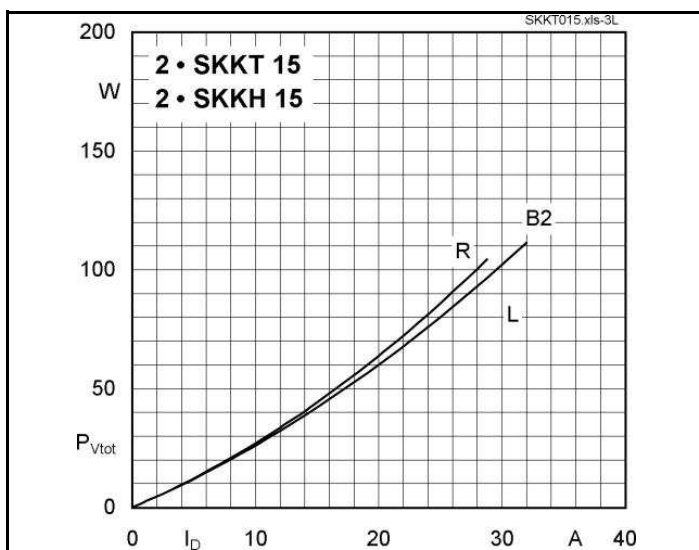


Fig. 3L Power dissipation of two modules vs. direct current










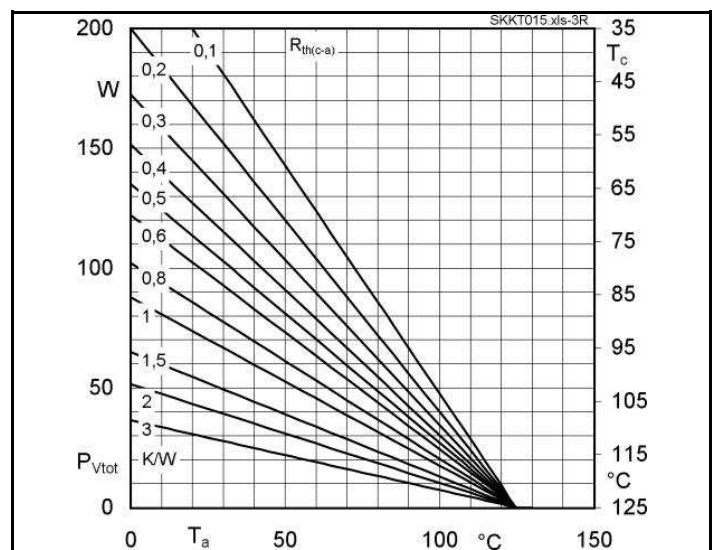


Fig. 3R Power dissipation of two modules vs. case temp.

SKKT 15, SKKH 15

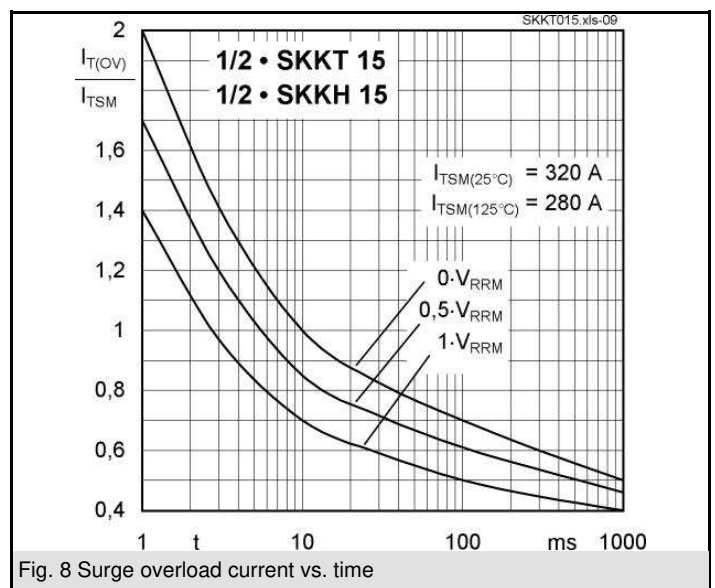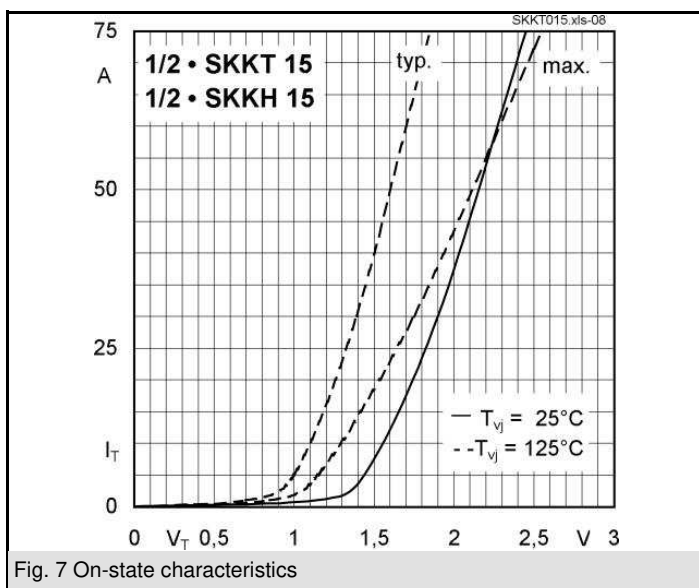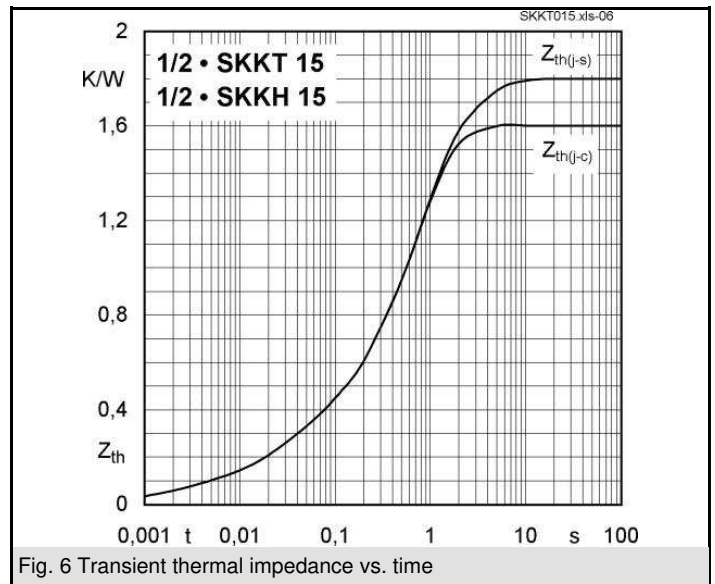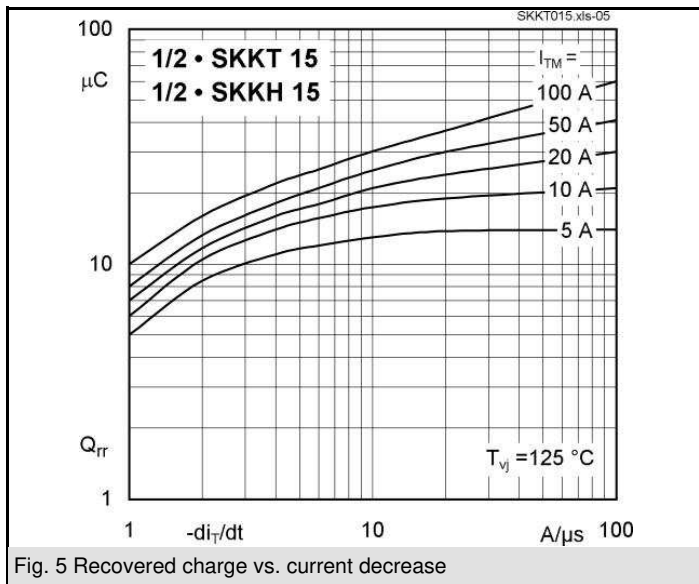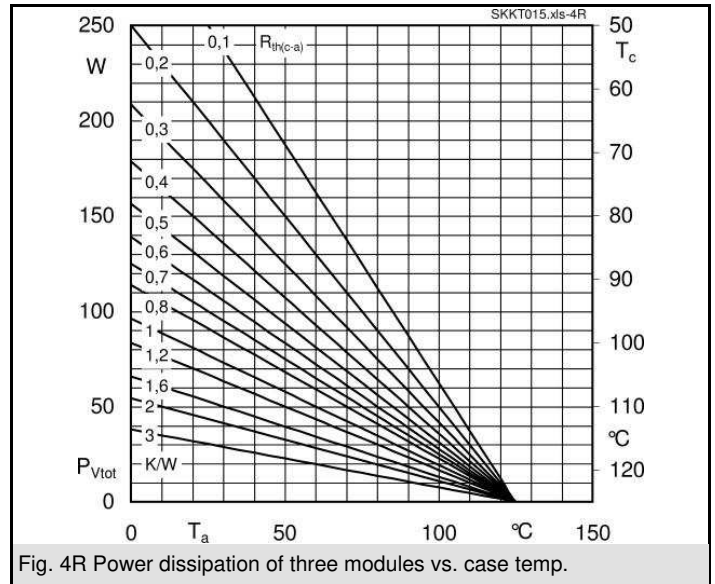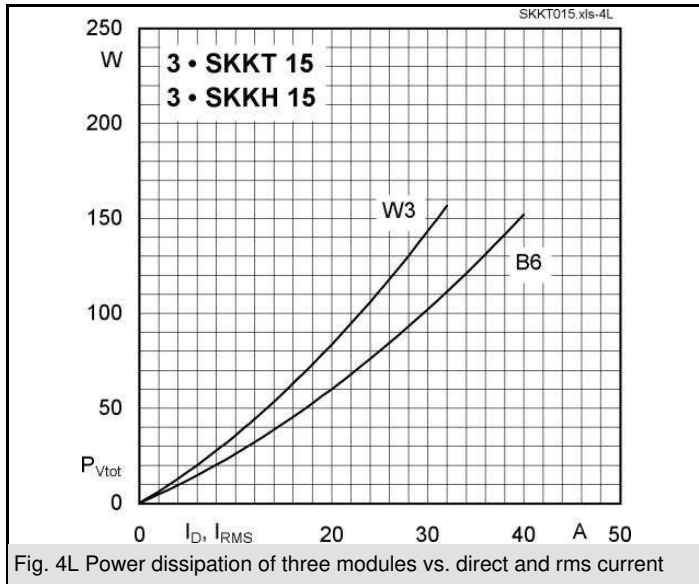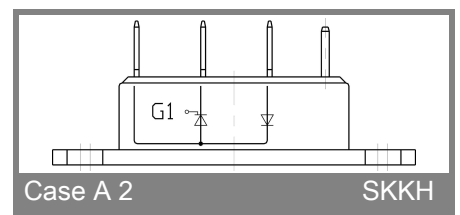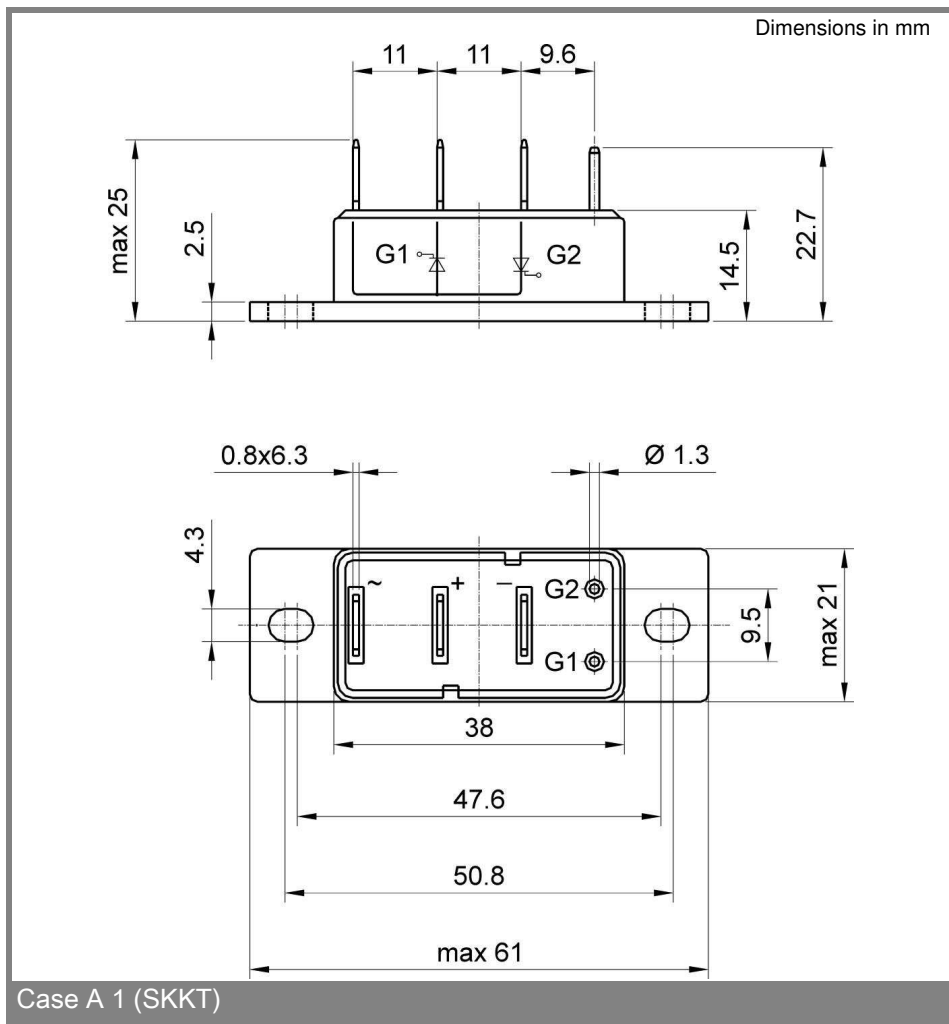

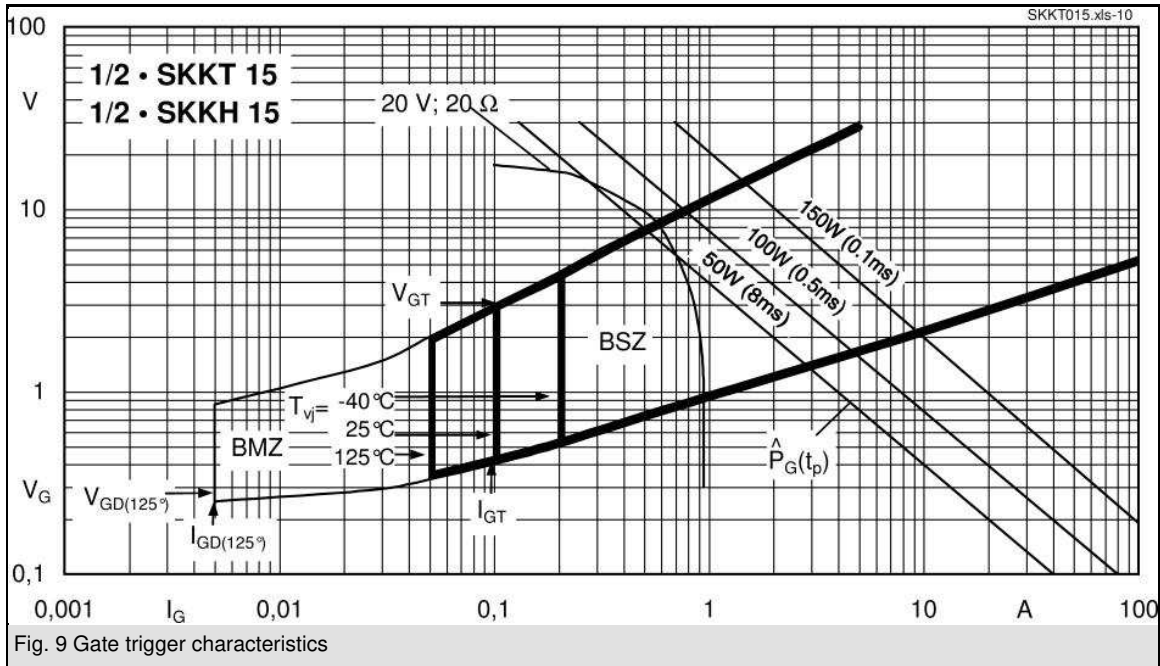

* The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON

SKKT 15, SKKH 15

products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our personal.